



Model S33SH48V

Description

1/3 HP Submersible Sump Pump

Features

High Efficiency Motor with IP 68 Protection, F Class Insulation and Built-in Thermal Overload Protection.

Cast Iron Motor Housing Under Anneal Process to Prevent Water Vapor Penetration into the Motor Caused by Temperature Rising and Cooling Shrinkage, Keeping Motor Insulation Dry.

With John Crane Mech. Seal Keeping Water Away from Shaft to Ensure Antitrust and Waterproof Capability.

Non-clogging Vortex Impeller Design.


Passes Solid Diameter Up to 3/8"

1 Year Warranty

Warranty

1 Year

Performance Curve

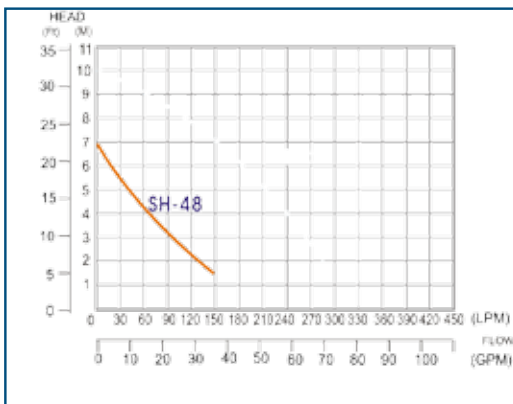

Specifications

Output	1/3 H.P.
Volt	115V ~ 60Hz
Float	Piggyback Switch
Discharge	1-1/2" / 1-1/4" FNPT
Dimensions	10.75" H x 7.88" W x 7.75" D
Weight	15.87 lbs
Cord Length	8'

Due to continuing product improvements, specifications may change without notice.