




## FEATURES

- High Efficiency Motor with IP 68 Protection
- F Class Insulation and Built-in Thermal Overload Protection.
- Cast Iron Motor Housing Under Anneal Process to Prevent Water Vapor Penetration into the Motor Caused by Temperature Rising and Cooling Shrinkage, Keeping Motor Insulation Dry.
- With John Crane Mech. Seal Keeping Water Away from Shaft to Ensure Antitrust and Waterproof Capability.
- Non-clogging Vortex Impeller Design.
- Passes Solid Diameter Up to 3/8"

## PERFORMANCE CURVE

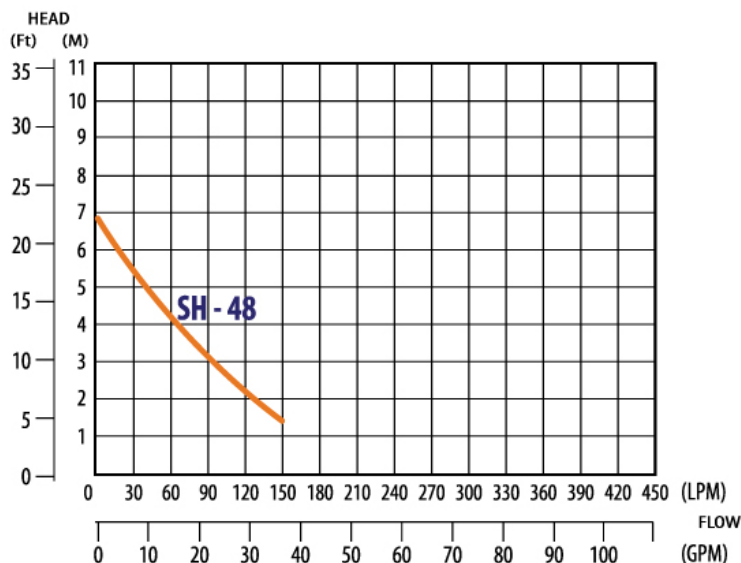

## WARRANTY

1-Year Warranty

## SPECIFICATIONS

**S33SH-48V .3315966**

<b>OUTPUT</b>	1/3 HP
<b>VOLT</b>	115 ~ 60Hz
<b>AMPERAGE</b>	5A
<b>FLOAT</b>	Piggyback Switch
<b>DISCHARGE</b>	1-12" / 1-1/4" FNPT
<b>DIMENSIONS</b>	10-3/4" x 7-7/8" x 7-3/4"
<b>WEIGHT</b>	15.87 lbs
<b>CORD LENGTH</b>	8'