



FEATURES



- Top suction design helps eliminate air locks and filters debris
- Easy access handle designed for easy portability
- Corrosion-resistant, reinforced thermoplastic construction
- Oil-filled permanent split capacitor motor and built-in automatic thermal overload protector
- For use in 14" diameter or larger sump basins
- 1-1/2" NPT discharge with 1-1/4" NPT adapter included
- Meets or exceeds the following:
 - cULus listing



Model	HP	V	ID
S33SP-13	1/3	115	.3561352
S33SP-12	1/2	115	.3561353

WARRANTY

1 year warranty. Visit stream33.com for details.

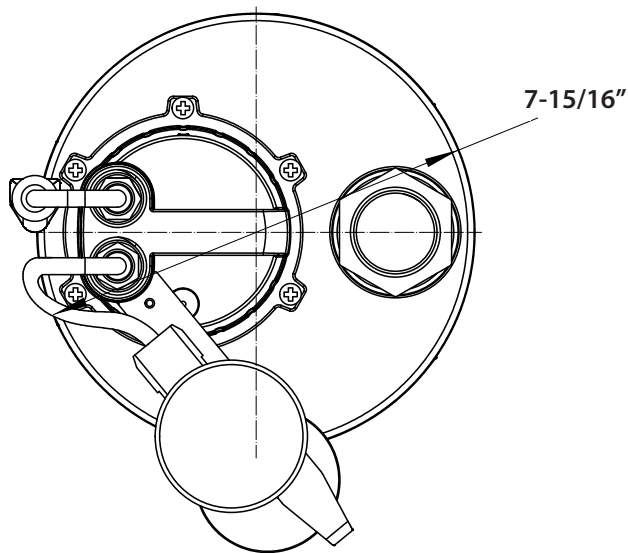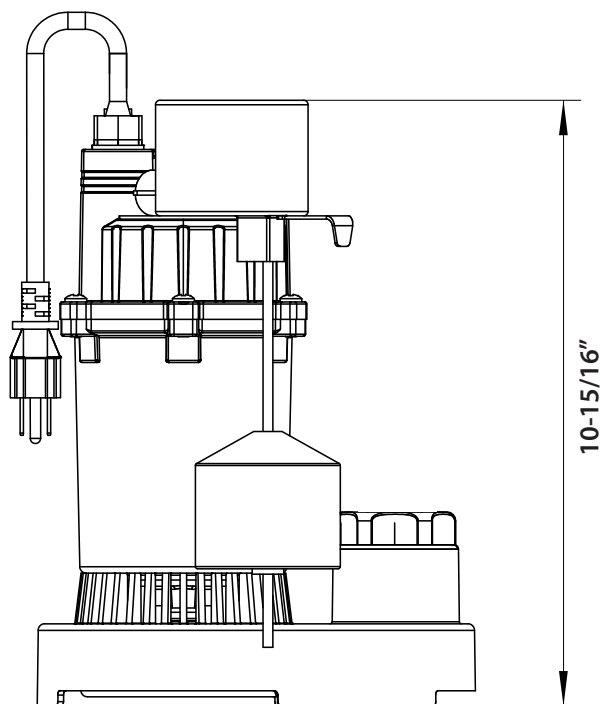

TECHNICAL SPECIFICATIONS

Model	S33SP-13	S33SP-12
Motor	115V, 60Hz	115V, 60Hz
Cord Length	10 ft.	10 ft.
Amperage	4.6A	5.0A
Outlet	1-1/2" with 1-1/4" adapter included	1-1/2" with 1-1/4" adapter included
Flow Rate	2560 GPH	2980 GPH
Horsepower	1/3HP	1/2HP
Switch Type	Integrated Vertical Float Switch	Integrated Vertical Float Switch
Construction	Thermoplastic	Thermoplastic
Head Max	26 ft.	28 ft.
Dimensions	10-15/16" x 7-15/16" x 7-15/16"	10-15/16" x 7-15/16" x 7-15/16"

PERFORMANCE

Model	GPH of water @ Total Ft. Head					Max. Head
	5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	
S33SP-13	2560	2300	1900	1000	100	26 ft.
S33SP-12	2980	2600	2300	1800	1000	28 ft.

