




Model	ID	Size	Color
S3312PPSFELBOW-PEXB	.3484305	1/2" x 1/2"	Black

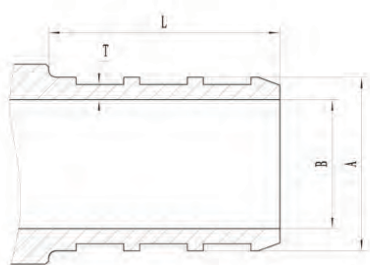

Size	Outside Dia. (A)	Min. ID (B)	Insert Length (L)	Min. Wall (T)
3/8"	0.347"	0.197"	0.7+0.2"	0.05"
1/2"	0.473"	0.315"	0.7+0.2"	0.056"
3/4"	0.668"	0.46"	0.7+0.2"	0.082"
1"	0.856"	0.61"	0.85+0.2"	0.1"

Outside diameter within variance of 0.003".

SUBMITTAL SHEET

PROJECT INFORMATION

Job Name:

Location:

Engineer:

Contractor:

P.O. Number:

Representative:

MODELS

☐ S3312PPSFELBOW-PEXB

FEATURES

- Acudel® 22000, RADEL® R-5100
- For use in hot and cold potable water distribution systems

OPERATING SPECIFICATIONS

- Max pressure/temperature: 150 PSI at 200°F

APPROVALS

- NSF/ANSI Standard 14
- NSF/ANSI Standard 61
- NSF/ANSI Standard 372
- ASTM F2159, F877
- CSA B137.5

INSTALLATION GUIDE

PPSU fittings should never be exposed to pipe dopes, glues or sealing adhesives, lubricants, or any other solvent. PPSU fittings should be stored and installed away from direct sunlight and other UV exposure. Complete installation instructions for PEX plumbing systems can be found at stream33.com.

RECOMMENDED ACCESSORIES

Model	ID	Description
S3312CCR	.3484321	1/2" Copper Crimp Ring
S3334CCR	.3484322	3/4" Copper Crimp Ring
S331CCR	.3484323	1" Copper Crimp Ring
S3312SSCC	.3492324	1/2" Stainless Steel Cinch Clamp
S3334SSCC	.3492323	3/4" Stainless Steel Cinch Clamp
S331SSCC	.3492326	1" Stainless Steel Cinch Clamp