



SUBMITTAL SHEET

Project Information

Job Name:

Location:


Engineer:

Contractor:

P.O. Number:

Representative:

Model	ID	End Style	Length
S33-DWSL-383812	.3578561	3/8" Comp x 3/8" Comp	12"
S33-DWSL-383816	.3578563	3/8" Comp x 3/8" Comp	16"
S33-DWSL-383820	.3578564	3/8" Comp x 3/8" Comp	20"
S33-EFSL-383872*	.3406500	3/4" FGH x 3/8" MIP	72"

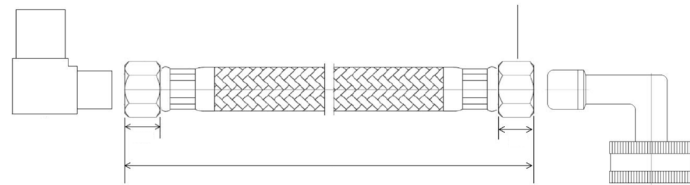

*Elbows Included

FEATURES

- Flexible, corrosion resistant design
- Reinforced PVC inner hose for durability
- Rubber washers for a water-tight, sealed connection
- For use in potable water distribution systems in accessible locations only
- Model EFSL-383872 includes additional elbow fittings
- Temperature rating: 40° - 160° F
- Pressure rating: 125 PSI maximum
- Meets or exceeds the following:
 - cUPC
 - NSF/ANSI 61



Material Specifications

Inner Hose	Reinforced PVC
Braiding	Stainless Steel Wire
Barb	Brass
Ferrule	Stainless Steel
Compression Nut	Brass
Washers	Rubber
Elbows	Brass
Nut	Brass