



SUBMITTAL SHEET

Project Information

Job Name:

Location:

Engineer:

Contractor:

P.O. Number:


Representative:

FEATURES

- Flexible, corrosion resistant design
- Reinforced PVC inner hose for durability
- Rubber washers for a water-tight, sealed connection
- For use in potable water distribution systems in accessible locations only
- Temperature rating: 40° - 160° F
- Pressure rating: 125 PSI maximum
- Meets or exceeds the following:
 - cUPC
 - NSF/ANSI 61



Model	ID	End Style	Length
S33-EFSL-387809	.3406506	3/8" Comp x 7/8" Ballcock Nut	9"
S33-EFSL-387812	.3406507	3/8" Comp x 7/8" Ballcock Nut	12"
S33-EFSL-387816	.3406508	3/8" Comp x 7/8" Ballcock Nut	16"
S33-EFSL-387820	.3406509	3/8" Comp x 7/8" Ballcock Nut	20"

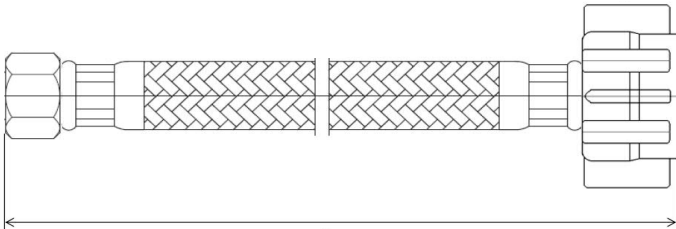

Material Specifications

Inner Hose	Reinforced PVC
Braiding	Stainless Steel Wire
Barb	Brass
Ferrule	Stainless Steel
Nut	Brass
Washers	Rubber
Compression Nut	Brass