

SUBMITTAL SHEET

Project Information

Job Name:

Location:



Engineer:

Contractor:

P.O. Number:

Representative:

Model	ID	End Style	Length
S33-FSL-383812*	.3578565	3/8" Comp x 3/8" OD Comp	12"
S33-EFSL-381212	.3406501	3/8" Comp x 1/2" FIP	12"
S33-EFSL-381216	.3406503	3/8" Comp x 1/2" FIP	16"
S33-EFSL-381220	.3406504	3/8" Comp x 1/2" FIP	20"
S33-EFSL-381230	.3406505	3/8" Comp x 1/2" FIP	30"

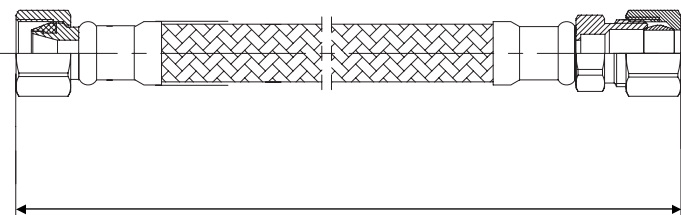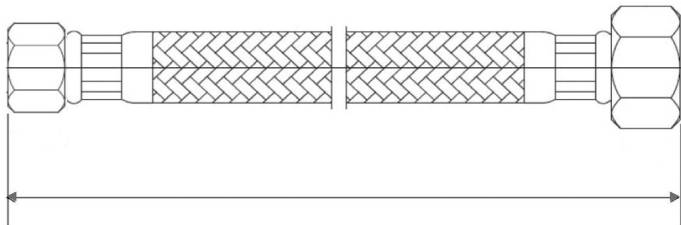

* Applies to S33-FSL-383812

FEATURES

- Flexible, corrosion resistant design
- Reinforced PVC inner hose for durability
- Rubber washers for a water-tight, sealed connection
- For use in potable water distribution systems in accessible locations only
- Temperature rating: 40° - 160° F
- Pressure rating: 125 PSI maximum
- Meets or exceeds the following:
 - cUPC
 - NSF/ANSI 61



Material Specifications

Inner Hose	Reinforced PVC
Braiding	Stainless Steel Wire
Barb	Brass
Ferrule	Stainless Steel
Nut	Brass
Washers	Rubber
Compression Nut	Brass