


S33-383858DHSV .3570413

INLET	OUTLETS	DIMENSIONS (in)	
		A	B
5/8" OD Comp	3/8" OD Comp	2	4.5

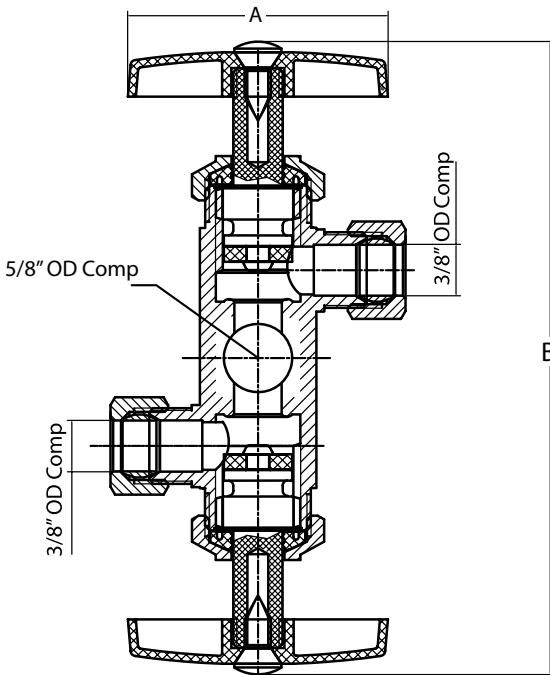

## SUBMITTAL SHEET

### Project Information

Job Name:

Location:

Engineer:

Contractor:

P.O. Number:

Representative:

### MODELS

S33-383858DHSV

### DESCRIPTION

Stream33® Dual Handle Stop Valve allows users to shut off water flow to one fixture while keeping water flow to another fixture. The handle gives the user a secure grip for smooth operation, and is easy to remove to help protect accidental stop operation during a rough installation.

### FEATURES

- Forged one-piece brass body construction
- Multi-turn
- Dual handle stop valve

### APPLICATIONS

- Only use in potable water distribution systems in accessible locations
- Do not use for recirculation systems or continuous use temperatures above 115° F

### OPERATING SPECIFICATIONS

- Temperature rating: 40° - 160° F
- Pressure rating: 125 PSI maximum

### APPROVALS

- cUPC
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 372 and NSF/ANSI/CAN 61

MATERIAL SPECIFICATIONS	
Body	Brass
Stem	POM
Bib & Packing Washers	Rubber
Packing Nut	Brass
Handle	ABS
Handle Screw	Stainless Steel
Compression Sleeve	Brass
Compression Nut	Brass