




Sweat/MIP



PEX-A



PEX-B

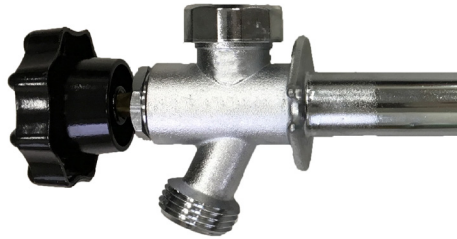

## FEATURES

- 3/4" Male garden hose thread outlet
- Quarter-turn operation
- Auto draining if water is shut off and hose is removed or open
- Heavy-duty metal handle
- Max. operating temperature rating: 140° F
- Max. operating pressure rating: 125 PSI
- Meets or exceeds the following:
  - ASME A112.18.1/CSA B125 standards
  - ASSE 1019-A standards




Model	ID	Description	Connection Type
S333420-3008	.3347094	1/2" x 8"	Sweat/MIP
S33FFSPEXA-8	.3408277		PEX-A Expansion
S33FFSPEXB-8	.3408278		PEX-B Crimp
S333420-3010	.3331294	1/2" x 10"	Sweat/MIP

## WARRANTY

1-Year warranty. Visit [stream33.com](http://stream33.com) for details.

## PARTS & MATERIALS

Part #	Description	Material
1	Handle Bolt	Brass
2	Name Plate	Aluminum
3	Handwheel	Zinc Alloy
4	Bonnet	Brass
5	Washer	Stainless Steel
6	Packing	Rubber
7	Washer	Stainless Steel
8	Stem Pipe	Brass
9	Stem	Brass
10	Spring	Stainless Steel
11	O-Ring	Rubber
12	Spring Seat	Brass
13	Packing	Rubber
14	Seat Holder	Brass
15	Seat Packing	Rubber
16	Seat Screw	Brass
17	Body	Brass
18	Pipe Flow	Brass
19	Nipple	Brass
20	Flange Packing	Plastic
21	Floating	Plastic
22	Floating Packing	Rubber
23	O-Ring	Rubber
24	Bolt Packing	Plastic
25	Cap	Brass

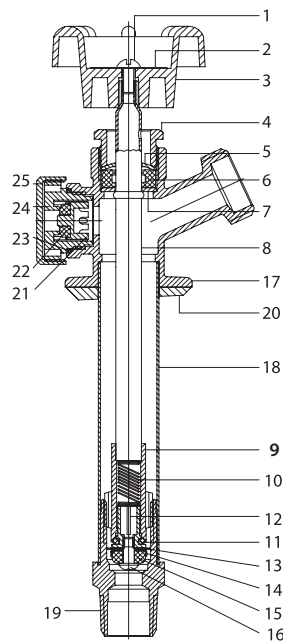


## RECOMMENDED REPLACEMENT PARTS

G1		G2		Description
Model	ID	Model	ID	
S33SRK8-G1	.3621485	S33SRK8	.3598336	8" Sillcock Repair Kit (Handle, Valve Stem, Gasket and Cartridge)
S33SRK10-G1	.3621486	S33SRK10	.3598338	10" Sillcock Repair Kit (Handle, Valve Stem, Gasket and Cartridge)

User must determine the sillcock length for replacement part kit.

## G1 VS G2 REFERENCE GUIDE

Model	Certification
G1	ASSE-1019-A 28900
G2	ASSE1019 NSF/ANSI/CAN61



Model differences can be found molded on the side of the body.